
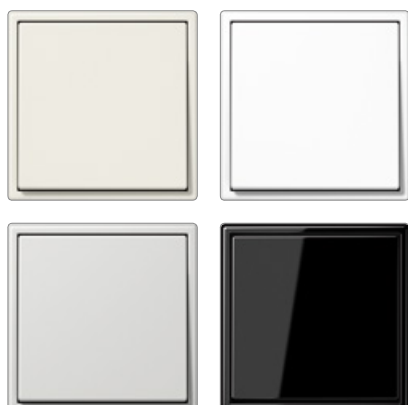


1:1

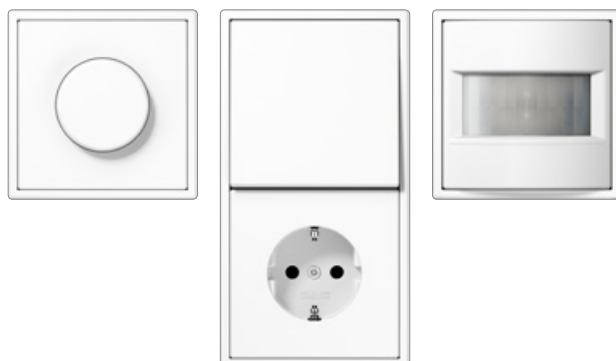

Flush-mounted range

Material Duroplastic

Protection level

Protection level IP 44 is ensured with sealing gasket ref.-no. 551 WU and „IP 44 frame“ of the respective design range.


P Colour printing possible

Colours

- P** ivory similar RAL 1013
- P** white similar RAL 9010
- P** light grey similar RAL 7035
- black similar RAL 9005

Selected devices are available in the colours

- green similar RAL 6029
- orange similar RAL 2004

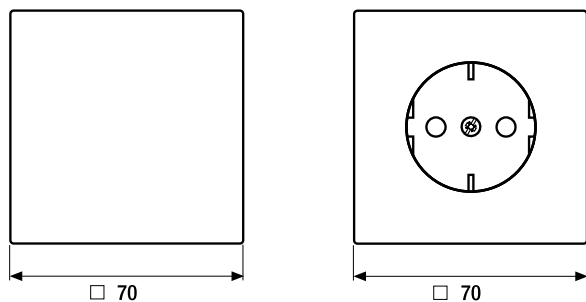

Frame size

1-gang	81 mm x 81 mm
2-gang	152 mm x 81 mm
3-gang	223 mm x 81 mm
4-gang	294 mm x 81 mm
5-gang	365 mm x 81 mm

Frames can be installed horizontally and vertically.

Corner radius of frames R 2

